

DAPHNE SUPERCOAT WR

Description

Daphne Super Coat WR is Water displacement type rust preventive oil and low viscosity type rust preventive oil and prevents from rust during processing. And its excellent water displacement property makes it a cleaner for removing water.

Features & Characteristics

Daphne Super Coat WR is mainly composed of highly refined mineral, rust inhibitor, and water displacement additive. And this product does not contain barium component which is concerned about environmental influence. It has good rust prevention performance despite its low viscosity.

- (1) Excellent water displacement property and good rust prevention.
- (2) Good water separation property makes it a quick oil-water separation within about 90 seconds.
- (3) Distinguishable appearance of the blue transparent and easy to drain out.
- (4) Saves cost due to low viscosity.

Chemical and Physical Properties

Test Item	Test Method	Unit	Result
Density at 15°C	ASTM D4052	g/cm ³	0.806
Color (Appearance)	SIS K319	-	Blue
Flash Point(C.O.C)	ASTM D92	°C	92
Viscosity at 40°C	ASTM D445	mm ² /s	2.5
Acid Number	ASTM D664	mgKOH/g	3.8
Humidity chamber test	JISK2246	-	240Hr

Example of water displacement property of Daphne Super Coat WR

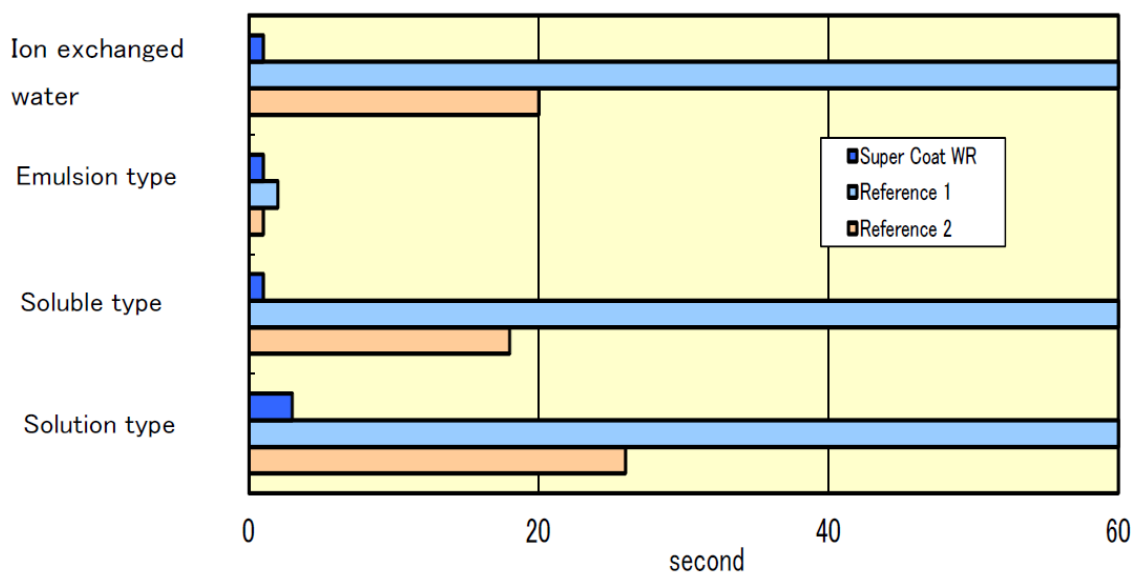


Figure : The time of displacement of ion-exchanged water or water soluble cut oil coated on steel

Attention

- (1) Depending on the constitution, it may cause a skin disorder. When it contacts your skin, please wash well with soap and use the protective cream.
- (2) Please prevent from accidental ingestion.
- (3) Depending on the previous process of rust preventive process, the way of spreading rust preventive oil, and the usage condition, it could not show sufficient ability.

Package

200L D/M, 20L Pail

- Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Safety Data Sheet (SDS) are followed.
- SDS is available upon request through your sales contract office, or via the internet.
<https://www.idemitsu.com/jp/business/lube/>
- Due to continual product research and development, the information contained herein is subject to change without notification.

Malaysia
Idemitsu Lube (Malaysia) Sdn. Bhd.

Kuala Lumpur Branch
Tel: (60) 3 6157 9529 Fax: +60 3 6157 9636

Johor Branch
Tel: (60) 7 550 0460 Fax: +60 7 550 0466

Penang Branch
Tel: (60) 4 501 2268 Fax: +60 4 501 2269

Singapore Branch
Tel: (65) 6256 6843 Fax: +65 6256 6384

Thailand
Apollo (Thailand) Co., Ltd
Tel: (66) 3 845 6900 Fax: (66) 3 821 0099

Vietnam
Idemitsu Lube Vietnam Co., Ltd.
Tel: (84) 31 3246 508 Fax: (84) 31 3246 509

India
Idemitsu Lube India Pvt. Ltd.
Tel: (91) 11 66794200 Fax: (91) 11 66794259

Indonesia
PT. Idemitsu Lube Techno Indonesia
PT. Idemitsu Lube Indonesia
Tel: (62) 21 8997 7630

Philippines
Idemitsu Lubricants Philippines Inc.
Tel: (63) 2 8 282 855 Fax: (63) 2 8 524 0617